



## AC/DC 整机工控电源

### JWAK 高电压输入整机工控电源系列--75W 单路输出

JWAK Switching Power Supply Series With High Voltage Input--75W Single Output

#### 典型性能 Typical Performance

- ◆外形尺寸: 160\*98\*40 (mm)  
Dimension: 160\*98\*40 (mm)
- ◆宽输入电压范围  
Wide range input voltage
- ◆高效率、高功率密度、低纹波  
High efficiency、High power density、Low ripple & noise
- ◆105℃长寿命电解电容  
105℃ long life electrolytic capacitors
- ◆高可靠性、三年保修  
High reliability、three-year warranty
- ◆安规: EN60950  
Ann rules: EN60950



#### 输入特性 Input Features

输入电压范围 Input voltage range	:265~450VAC 370~635VDC	380VAC
输入电压频率 Input voltage frequency		47~63Hz
输入冲击电流 Inrush current	380VAC 冷启动 380VAC Cold start,	≅ 40A

#### 输出特性 Output Features


输出电压精度 Voltage tolerance	标称电压 Nominal voltage	≅ ±1% (3.3V、5V ≅ ±2%)
电压调整率 Line regulation (full load)	输入电压从低端到高端变化 Change of input voltage from lowend to highend	≅ ±0.5%
负载调整率 Load regul	20%~100%负载变化 20%~100% Load change	$V_O \cong \pm 0.5\%$
纹波噪声 Ripple&Noise	20M 带宽 20M Bandwidth	≅ 1%
温度系数 Temperature coefficient		±0.02%/℃
过功率保护 Output overload Protection		115~150%额定电流,自恢复 115~150%rated output powerl,auto recovery
短路保护 Short Circuit Protection		长期, 自恢复 Long-term,auto recovery
效率 Efficiency	输入标称电压、满载 Input rated voltage、fullload	80% (典型值) 80%(typical)
启动时间 Rise time	220VAC 满载 220VAC Fullload	800mS (典型值) 800ms (typical)
保持时间 Hold up time	220VAC 满载 220VAC Full oad	50mS (典型值) 50ms (typical)

#### 一般特性 General Features

隔离耐压 Withstand voltage	输入对输出、输入对地 I/P-O/P、I/P-F/G 输出对地 O/P -F/G (1分钟, 漏电流 ≅ 5mA) (1Mintute leakage current) ≅ 5mA)	1500VAC  500VAC
绝缘电阻 Isolation resistance	500V	≅ 50MΩ
MTBF	环境 25℃ Environment 25℃	2.0*10 <sup>5</sup> Hrs
工作温度 Operating temperature	55℃以上降额使用 Above 55℃ derating make	-25℃~70℃(-40℃~70℃)
储存温度 Storage temperature		-40℃~85℃
工作相对湿度 Operating humidity	无凝露及结冰现象 (non condensing)	10%~90%RH
储存相对湿度 Storage humidity	无凝露及结冰现象 (non condensing)	5%~95%RH
冷却方式 Cooling method		自然冷却 Convection

**命名方式** Naming Rules

**JWAK- 50 S 5 G**

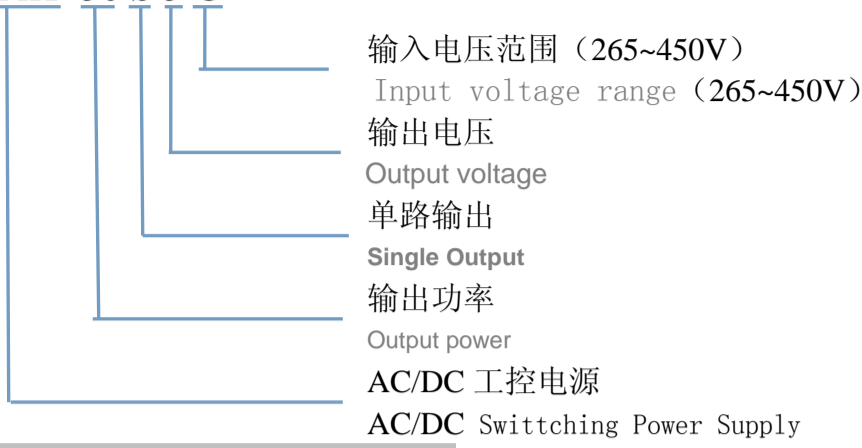

**产品选型** Product Selection Table

产品型号 Model No.	输出电压 Output voltage Vo	输出电流 Output current Io	输出电压精度 Output voltage tolerance	纹波噪声 R&N V <sub>(P-P)</sub> mV	效率 Efficiency
JWAK-75S3.3G	3.3V	0~22.7A	±2%	100mV	74%
JWAK-75S5G	5V	0~15.0A	±2%	100mV	76%
JWAK-75S12G	12V	0~6.3A	±1%	120mV	79%
JWAK-75S15G	15V	0~5.0A	±1%	150mV	80%
JWAK-75S24G	24V	0~3.2A	±1%	150mV	81%
JWAK-75S48G	48V	0~1.6A	±1%	200mV	83%


注：1、纹波噪声测试方法：使用一根 12” 双绞线，在终端并联 0.1uF 和 47uF 电容，在 20MHz 带宽下测试。

2、因篇幅有限，以上只是部分产品列表，若需列表以外产品，请与本公司销售部联系。

Note: 1、Ripple & noise are measured at 20MHz of bandwidth by using a 12”twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor

2、Due to space limitations ,the above list is only for some products, If other than a list of products, please contact the Company’s sales department.

**安装尺寸图** Mechanical Data

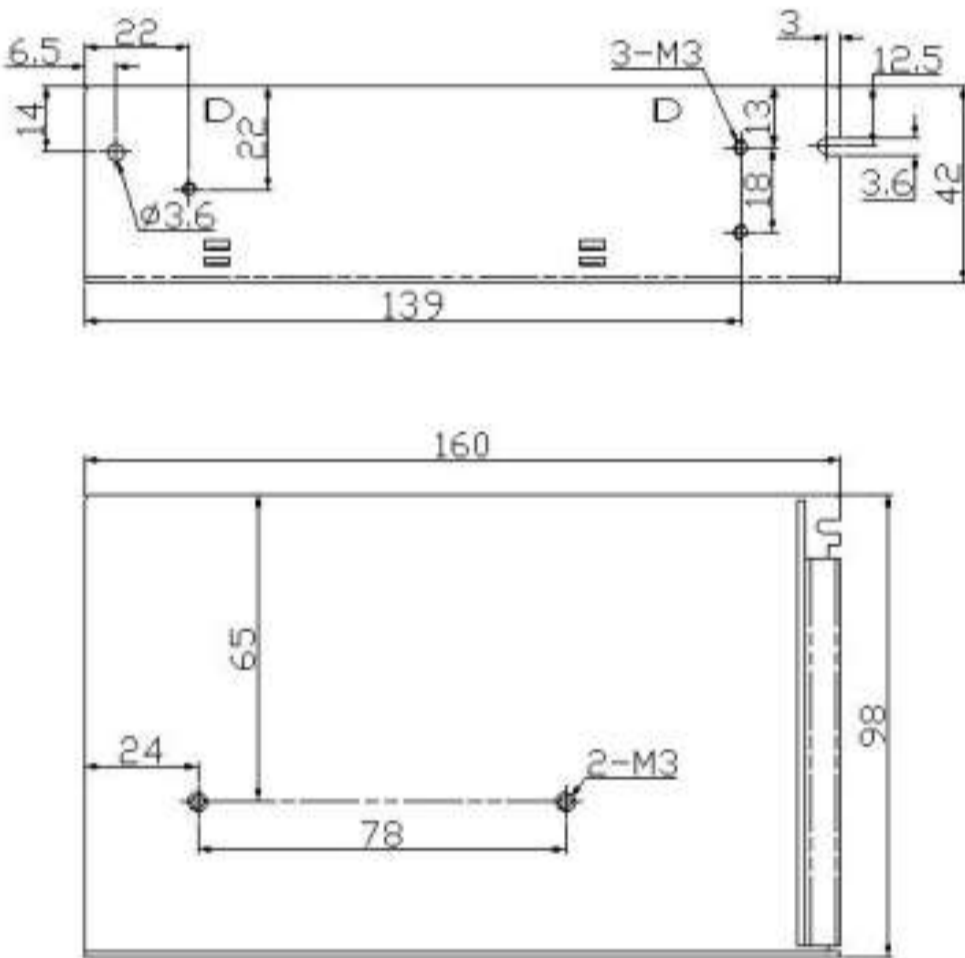

注：电源安装尺寸如与选型手册不符，请以实物尺寸为准。

Note: Power mechanical data does not match with the hand book, Please refer to product size